


**GIUNTI GIREVOLI OLEODINAMICI
in acciaio zincato**


**HYDRAULIC SWIVEL JOINTS
in galvanized steel**

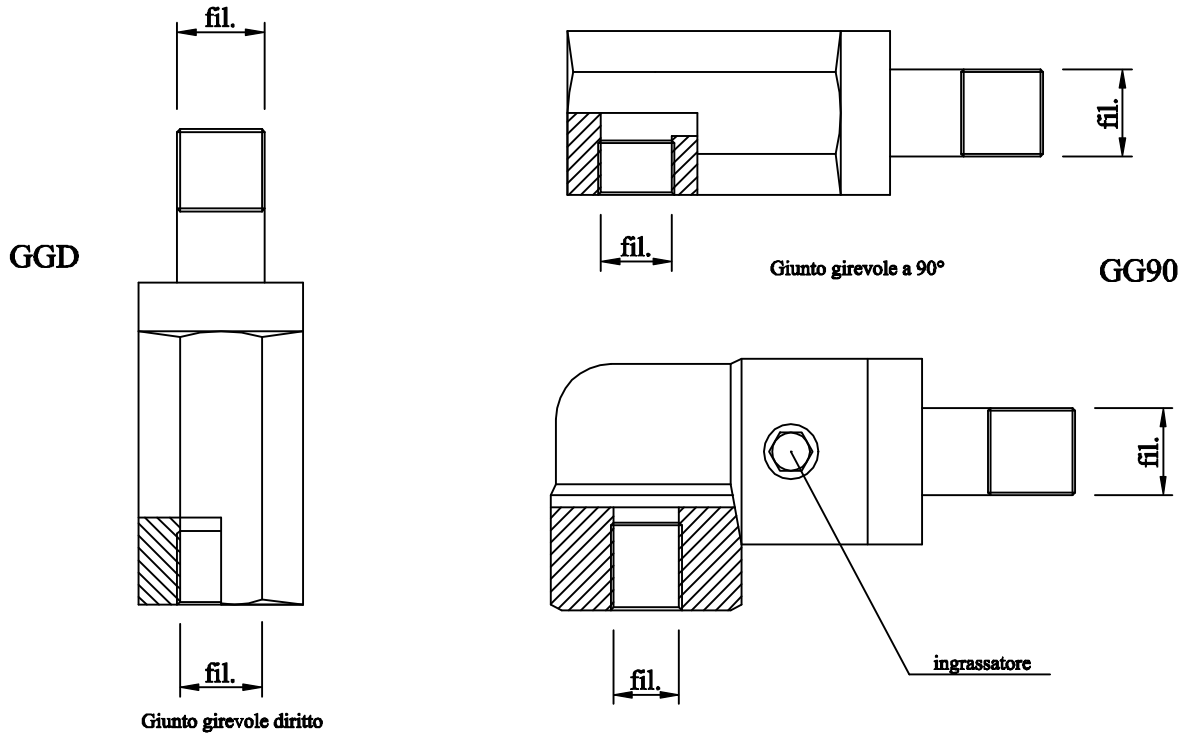

fil.	3/8	1/2	3/4	1"	1.1/4	1.1/2	2"
press. [bar]	210	210	210	210	180	160	150

**HYDRAULIC CHECK VALVES
in galvanized steel and stainless steel AISI 316**

**VALVOLE DI RITEGNO OLEODINAMICHE
in acciaio zincato e inox AISI 316**

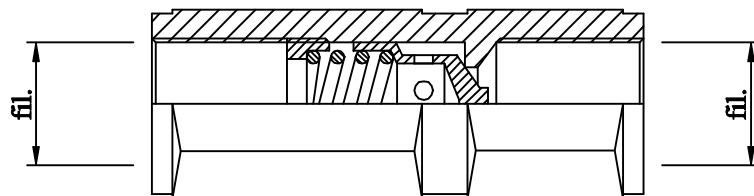

VRGR = steel

VR/X = AISI 316

Pressione di apertura standard: 1bar. Altre a richiesta.
Standard opening pressure: 1bar. Other pressure at the request.

	fil.	1/8	1/4	3/8	1/2	3/4	1"	1.1/4	1.1/2	2"
Steel	press. [bar]	700	700	700	500	500	500	300	300	300
AISI 316	press. [bar]	300	300	300	300	300	300 -	-	-	-